



# SUNTUF® BH

Corrugated High Impact Polycarbonate Sheeting



New Improved




- New, Stronger, Better
- 100% diffused light and reduced glare
- Three times thicker
- **2.8mm thickness for Better Hail Resistance**





## ACCESSORIES

Capping \* 8æZ[ Ye



InXlls



Self Drilling Screws



Clearfix  
65mm

Purlin  
Tape



Back Channel  
InXll Tape



Use Clearfix 65mm Self Drilling Screws save up to 50% on installation time.

## Handling and Storage

- Store sheets on a flat surface in a well-protected and shaded area out of direct sunlight.
- Sheets stacked / stored in the sun will be affected by heat build-up and possible distortion. Any damage caused by this will void the warranty.
- Take care to avoid moisture build up between stored sheets which can cause possible whitening of the sheets.
- Ensure sheets are free from any chemical, paint solvent and sealant contact (including silicone type products) these type of products are incompatible with polycarbonate sheeting.
- Sheets may be cleaned with warm soapy water and a soft sponge. Hose down thoroughly – ensure all possible safety precautions are taken.

## Product Warranty

Full warranty terms and conditions available from:  
[www.palram.com.au](http://www.palram.com.au)

## Safety

Never walk directly on Suntuf®, or any other polycarbonate/PVC sheets. Use a board placed across at least 3 purlins to spread the load.

## Product Availability

Colors	Clear - LT-90% HT-88% S Grey - LT-12% HT-40%		
Thickness	2.8 mm		
Width	860 mm	Cover	760 mm
Profile	Drawing		

76/18 Corrugated





## INSTALLATION GUIDELINES

### Step 1

#### Purlins & Accessories

Maximum Purlin Spacing

Profile  
Corrugated  
End Span  
1100mm  
Mid Span  
1400mm

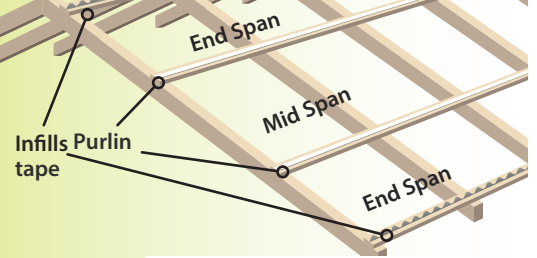


insure that your roof pitch is at least 5°.

### Etep 2

#### Fixings

Profile	End row	Mid row
Corrugated	every 2 <sup>nd</sup>	every 3 <sup>rd</sup>

Overlap: Corrugated - 1 1/2 corrugation


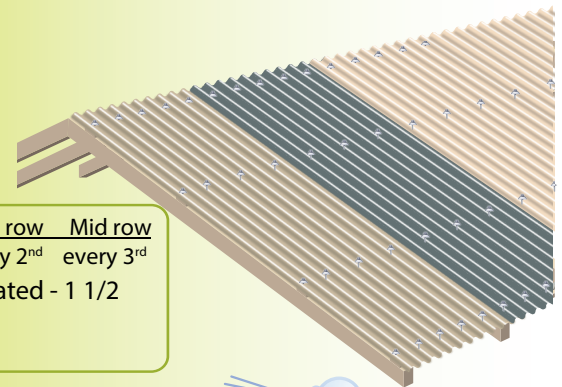


Prevailing wind direction


### Step 3

#### Capping & flashings for various installations

APEX ROOF - Fit barge capping to top of ridge where sheet meet and screw fix into top purlin.

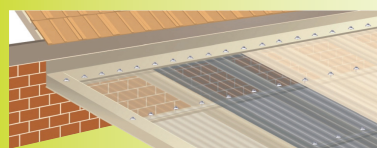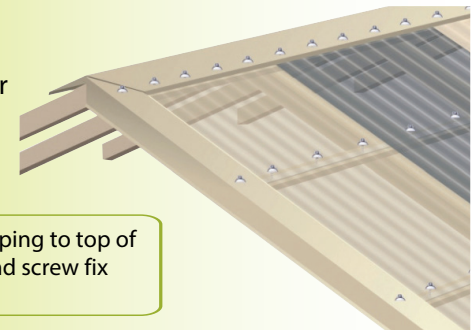

AGAINST A WALL/FASCIA - Fit barge capping to edge of sheet and apron flashing at the wall or fascia. Secure using recommended fixing screws.

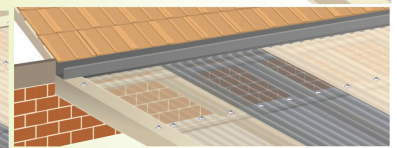

UNDER A GUTTER - Fit Back channel to fascia, slide sheet into channel and screw/fix, push foam infill to underside of sheeting.



#### PALRAM H/O VIC/TAS

34 Buys Court  
Derrimut VIC 3030  
Tel: (03) 9219 4444  
Fax: (03) 9219 4455  
salesvic@palram.com

#### PALRAM NSW/ACT

Unit 2 / 26 Redfern Street  
Wetherill Park NSW 2164  
Tel: (02) 8788 6100  
Fax: (02) 8788 6199  
salesnsw@palram.com

#### PALRAM QLD

Unit 9C / 380 Bilsen Road  
Geebung QLD 4034  
Tel: (07) 3172 5581  
Fax: (07) 3172 5516  
salesqld@palram.com

#### PALRAM SA/NT

517A Cross Keys Road  
Cavan SA 5094  
Tel: (08) 8262 2288  
Fax: (08) 8262 3388  
salessa@palram.com

#### PALRAM WA

74 Christable Way  
Landsdale WA 6065  
Tel: (08) 9302 4173  
Fax: (08) 9302 5287  
saleswa@palram.com



In as much as Palram Industries has no control over the use to which others may put the material, it does not guarantee that the same results as those described herein will be obtained. Each user of the material should make his own tests to determine the material's suitability for his own particular use. Statements concerning possible or suggested uses of the materials described herein are not to be construed as constituting a license under any Palram Industries patent covering such use or as recommendations for use of such materials in the infringement of any patent. Palram Industries or its distributors cannot be held responsible for any losses incurred through incorrect installation of the material. In accordance with our company policy of continual product development you are advised to check with your local Palram Industries supplier to ensure that you have obtained the most up to date information.

©1996-2011 PALRAM Industries Ltd. | Company and product names are trademarks of PALRAM Industries Ltd.

[www.palram.com.au](http://www.palram.com.au)